




Organized Living engineers the strongest ventilated wire shelving available. Lifetime Ventilated stands out as the best ventilated wire system in the industry by specifying larger diameter wire, higher quality, more durable epoxy powder coating, and a stronger anchoring system.

Why Specify Lifetime Ventilated?



- Only wire shelving to hold 75 lbs. per linear foot.
- Durable white or nickel epoxy coated wire for a lifetime of non-chip, non-stick performance.
- Epoxy coating won't get sticky over time and affect hangar movement like standard vinyl coating.
- Patented hardware.
- Green features that contribute up to six LEED points.
- No blocking required.
- Lifetime warranty.
- Proudly made in the USA.

COMPARISON OF UPPER FRONT ROD ON STORAGE SHELF

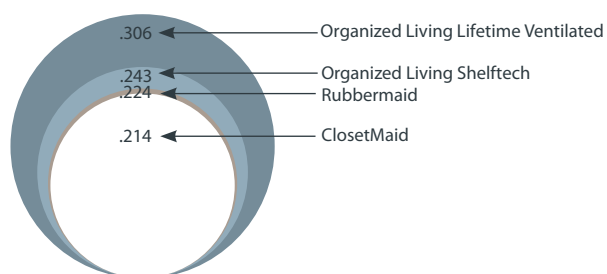


- 43% more steel than ClosetMaid
- 37% more steel than Rubbermaid
- 26% more steel than Shelftech

These are true scale comparisons of uncoated rods.


SUPERIOR HARDWARE

Only Organized Living Lifetime uses a true hollow wall anchor that rosettes to create a 360° degree contact behind the wall holding 40–50% more than the competition.

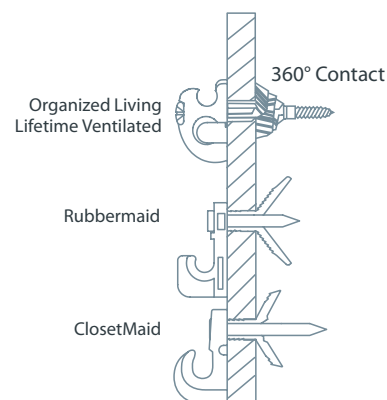



HOLDS MORE WEIGHT

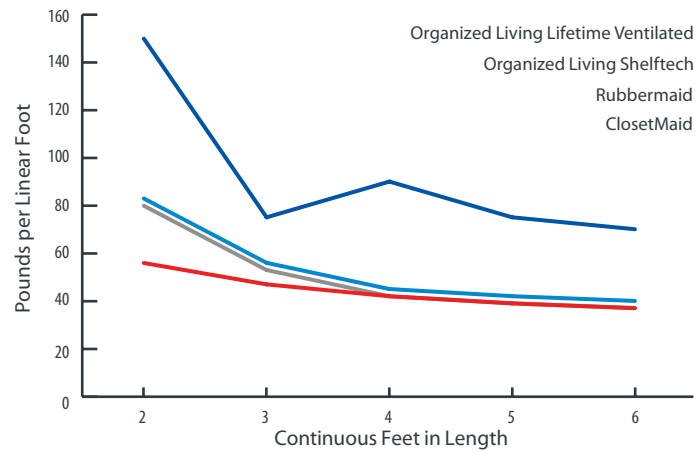

LIFETIME QUICK SPECIFICATIONS

APPLICATIONS: Walk-in closet, reach-in closet, secondary bedroom closet, linen closet, coat closet, pantry, laundry room, storage room.

MOUNTING: Wall mount.

SPECIFICATIONS: Procure and install Organized Living ventilated commercial-grade, epoxy wire shelving, nickel or white color options in all closets and storage spaces. Grade C 1008 cold drawn steel rod with an average tensile strength of 100,000 psi. Manufactured by Organized Living, Cincinnati, Ohio, 513-277-3700.

STATIC LOAD: 75 lb/ft shelf maximum.

3 PART SPECIFICATION HIGHLIGHTS

PART 1 GENERAL

Quality Assurance

A. Manufacturer Qualifications: With more than 100 years of engineering and manufacturing excellence, Organized Living delivers the strongest home storage and organization solutions for every area of the home.

B. Installer Qualifications: Factory trained and product experienced.

C. Provide Computer Generated 3-Dimensional drawings for each design variation.

D. Mock-Up: Provide a mock-up for evaluation of surface preparation techniques and application workmanship.

1. Finish areas designated by Architect.
2. Do not proceed with remaining work until workmanship, color, and product selection are approved by Architect.
3. Refinish mock-up area as required to produce acceptable work.

Warranty

Manufacturer warrants to the original purchaser of properly installed Organized Living Lifetime wire shelving, that it will remain free of any defects in material and workmanship for as long as the original purchaser owns the product. The word "defects", as used in this warranty, is defined as imperfections which impair the utility of the product. This warranty applies only to properly installed Organized Living Lifetime Ventilated Shelving used for domestic and consumer purposes. In the case of installation of Lifetime Ventilated Shelving used

for industrial, commercial or business purposes, these same products are warranted to be free of defects in materials and workmanship for a period of two (2) years from the date of purchase.

PART 2 PRODUCTS

Manufacturers

A. Acceptable Manufacturer: Organized Living;
3100 E Kemper Rd, Cincinnati, OH 45241.
Tel: (800) 669-3225 Tel: (513) 277-3700
Fax: (513) 277-3701

www.organizedliving.com

Email: customerservice@organizedliving.com.

B. Substitutions: Not permitted due to Organized Living higher quality engineering specifications on wire and rod gauges and baked on epoxy powder coating.

Closet Systems – Ventilated Storage Systems

Blocking is not required for Organized Living's Ventilated Storage Systems. Components are coated with beautiful white or nickel epoxy for a lifetime of non-chip, non-stick performance. Epoxy powder coating is environmentally friendly and contributes to LEED points.

A. Lifetime Ventilated storage systems as manufactured by Organized Living including component and accessories as required for complete installation.

B. Structural Performance: Back clips spaced 11" (279 mm) with support braces at 42" (1067 mm).

1. Static Load: 75 lb/ft (115 kg/m) of shelf maximum.
2. For heavy duty applications in pantry and garage applications space support brace on 2' (610mm).

PART 3 EXECUTION

Installation

A. Can be installed in any substrates in accordance with manufacturer's instructions.

B. Cut shelving up to 1" shorter than the length of the wall measurements, cap all exposed ends.

C. Install Shelving Plumb and Level and in accordance with shop drawings and manufacturers printed installation instructions.

Maintenance and Cleaning

Organized Living Lifetime Ventilated Shelving is coated with a durable epoxy powder coating that requires no regular maintenance. The shelving may be cleaned with a dusting cloth or with a non-abrasive, mild household cleaner.

Visit OrganizedLiving.com to download the full 3-Part Specifications and to get closet design ideas. Call us at 513-277-3700. We can create custom designs for your projects that convert to shop drawings.